

## Grappin coupeur - Snij-grijper

Cadre renforcé pour montage rigide / Lame de coupe remplaçable / Coquilles HARDOX.



Verstevigd frame voor rigid mounting / Wisselmes / HARDOX Schalen.



**TC-E serie**



**TC-E/R serie**

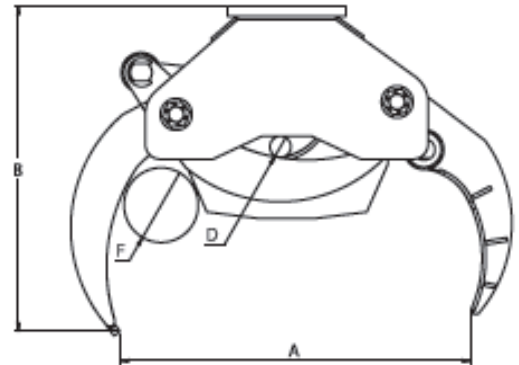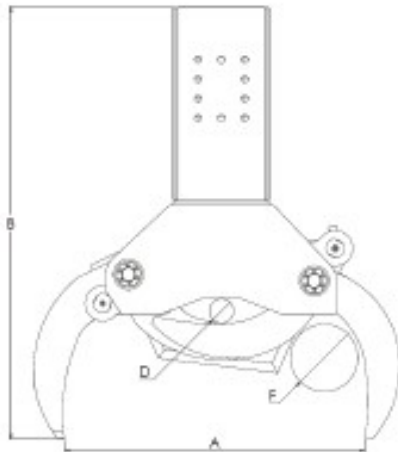

	Tonnage machine (T)	B (mm)	Poids Gewicht (kg)	A (mm)	F Capacité (mm)	D (mm)	Force Kracht (kN)	Débit Oilflow (l/min)	Pression Druk (bar)
TC210E	3,5 – 8	1295	235	937	210	75	53	50	250
TC210E/R	3,5 – 8	780	200	1140	210	75	53	50	250
TC250E	8 – 15	1545	370	1025	250	95	74	70	250
TC250E/R	8 – 15	899	330	1096	250	95	74	70	250
TC300E	12 – 20	1956	820	1410	300	85	80	70-100	300
TC300E/R	12 – 20	1308	770	1413	300	85	80	70-100	300